

2006

Hydrologic measurements and implications for tree island formation within Everglades National Park

Jose Bazante

Department of Civil, Architectural, and Environmental Engineering, University of Miami

Gary Jacobi

Department of Civil, Architectural, and Environmental Engineering, University of Miami

Helena M. Solo-Gabriele

Department of Civil, Architectural, and Environmental Engineering, University of Miami

David Reed

Department of Biological Sciences and Southeast Environmental Research Center, Florida International University

Sherry Mitchell-Bruker

Everglades National Park

See next page for additional authors

Follow this and additional works at: http://digitalcommons.fiu.edu/fce_lter_journal_articles

Recommended Citation

Bazante, J., G. Jacobi, H. Solo-Gabriele, D.R. Reed, S. Mitchell-Bruker, D.L. Childers, L. Leonard, M.S. Ross. 2006. Hydrologic measurements and implications for tree island formation within Everglades National Park. *Journal of Hydrology* 329(3-4): 606-619.

This material is based upon work supported by the National Science Foundation through the Florida Coastal Everglades Long-Term Ecological Research program under Cooperative Agreements #DBI-0620409 and #DEB-9910514. Any opinions, findings, conclusions, or recommendations expressed in the material are those of the author(s) and do not necessarily reflect the views of the National Science Foundation.

This work is brought to you for free and open access by the FCE LTER at FIU Digital Commons. It has been accepted for inclusion in FCE LTER Journal Articles by an authorized administrator of FIU Digital Commons. For more information, please contact dcc@fiu.edu, jkrefft@fiu.edu.

Authors

Jose Bazante, Gary Jacobi, Helena M. Solo-Gabriele, David Reed, Sherry Mitchell-Bruker, Daniel L. Childers, Lynn Leonard, and Michael Ross

1 Hydrologic Measurements and Implications for Tree Island Formation
2 Within Everglades National Park
3
4
5
6
7
8

9 JOSE BAZANTE¹, GARY JACOBI¹, HELENA M. SOLO-GABRIELE¹, DAVID REED²,
10 SHERRY MITCHELL-BRUKER³, DANIEL L. CHILDERS², LYNN LEONARD⁴ AND
11 MICHAEL ROSS⁵

12
13 Submitted to *Journal of Hydrology* on

14 May 16, 2005

15 Revised and Resubmitted on December 28, 2005
16

¹ University of Miami, Department of Civil, Architectural, and Environmental Engineering, P.O. Box 248294, Coral Gables, Florida 33124-0630.

² Florida International University, Department of Biological Sciences & Southeast Environmental Research Center, Miami, Florida 33199.

³ Everglades National Park, 950 North Krome Avenue, Homestead, Florida 33030.

⁴ University of North Carolina at Wilmington, Department of Earth Sciences, 601 South College Road, Wilmington, North Carolina, 28403-5944.

⁵ Florida International University, Southeast Environmental Research Center, Miami, Florida 33199.

1 **ABSTRACT**

2 Tree islands in the Shark River Slough of the Everglades National Park (ENP), in the southern
3 state of Florida in the United States, are part of a wetland system of densely vegetated ridges
4 interspersed within relatively open sloughs. Human alteration of this system has had dramatic
5 negative effects on the landscape of the region and restoration efforts will require adjusting the
6 hydrology of the region to assure the preservation of these important ecologic features. The
7 primary objectives of this study were to document the hydrology in the vicinity of tree islands in
8 ENP by measuring velocities in time and space and by characterizing suspended sediments. The
9 results of such measurements were interpreted with respect to factors that may limit tree island
10 growth. The measurements were conducted in the vicinity of 3 tree islands known as Black
11 Hammock (BH), Gumbo Limbo (GL), and an unnamed island that was named for this study as
12 Satin Leaf (SL). Acoustical Doppler Velocity (ADV) meters were used for measuring the low
13 velocities of the Everglades water flow. Properties of suspended sediments were characterized
14 through measurements of particle size distribution, turbidity, concentration and particle density.
15 Mean velocities observed at each of the tree islands varied from 0.9 cm/s to 1.4 cm/s. Slightly
16 higher mean velocities were observed during the wet season (1.2 to 1.6 cm/s) versus the dry
17 season (0.8 cm/s to 1.3 cm/s). Maximum velocities of more than 4 cm/s were measured in areas
18 of *Cladium jamaicense* die-off and at the hardwood hammock (head) of the islands. At the
19 island's head, water is channelized around obstructions such as tree trunks in relatively rapid
20 flow which may limit the lateral extent of tree island growth. Channelization is facilitated by
21 shade from the tree canopy which limits the growth of underwater vegetation thereby minimizing
22 the resistance to flow and limiting sediment deposition. Suspended sediment concentrations
23 were low (0.5 mg/L to 1.5 mg/L) at all study sites and were primarily of organic origin. The

1 mean particle size of the suspended sediments was 3 microns with a distribution that was
2 exponential. Critical velocities needed to cause re-suspension of these particles were estimated
3 to be above the actual velocities observed. Sediment transport within the water column appears
4 to be at a near steady state during the conditions evaluated with low rates of sediment loss
5 balanced by presumably the release of equivalent quantities of particles of organic origin.
6 Existing hydrologic conditions do not appear to transport sufficient suspended sediments to
7 result in the formation of tree islands. Of interest would be to collect hydrologic and sediment
8 transport data during extreme hydrologic events to determine if enough sediment is transported
9 under these conditions to promote sufficient sediment accumulations.

10

11 **KEYWORDS:** Everglades, Tree Islands, Water Velocity, Suspended Solids, Restoration

12

13 **INTRODUCTION**

14 Tree islands are familiar features in many wetlands around the world. However, only
15 recently has their formation and hydrology been evaluated. According to Wetzel (2002), the
16 complex environment in which tree islands exist made it very difficult to understand their
17 formation process until aerial photography and radio carbon dating were available. Many
18 hypotheses on the formation of these islands were presented after these technologies developed
19 (Foster et al., 1983; Glaser, 1987; Wetzel, 2002; Gumbrecht et al., 2004), but few hydrologic data
20 have been acquired.

21 Tree islands are patches of woody vegetation within a freshwater wetland with
22 predominantly non-woody species (Wetzel, 2002). Around the world they can have different
23 shapes: elongated or tear drop, round or oval and linear strings or ridges (Wetzel, 2002). Tree

1 islands in the Shark River Slough in the Everglades National Park (ENP) are predominantly
2 elongated in shape and are an integral part of a ridge and slough environment.

3 The Everglades environment is composed of densely vegetated ridges interspersed with
4 relatively open sloughs following an organized pattern oriented parallel to the direction of flow
5 (Science Coordination Team, 2003). Human intervention has altered the ridge and slough
6 topography by creating a more uniform landscape and this alteration has had dramatic negative
7 effects on the ecology of the Everglades. The Science Coordination Team (2003) emphasized the
8 importance of determining the role of flow in the ridge and slough system and of the Everglades
9 ecosystem as a whole. Furthermore, the Team recommended that the ridge and slough be
10 monitored as a means to assess the progress of the Comprehensive Everglades Restoration Plan
11 (CERP) (Schnettler et al. 2003). Tree islands are an integral part of the ridge and slough system
12 and are particularly susceptible to changes in water flow, which further accentuates their
13 importance as an indicator of the condition of the ecosystem.

14 In this study, ridge and sloughs are defined based upon the type and density of the
15 emergent vegetation. Sloughs are dominated by *Eleocharis cellulosa* (spikerush) whereas ridges
16 are dominated by *Cladium jamaicense* (sawgrass). Periphyton, a community of algae, bacteria
17 and microfauna (Noe et al., 2001), and several species of *Utricularia* are present in the water
18 both in the ridge and slough areas. Elongated tree islands are part of the ridge system (Figure 1).
19 The upstream and highest part of the largest tree islands in Shark River Slough is called the
20 tropical hardwood hammock or “head” of the islands. The head has a well defined tree canopy.
21 The head of the islands under study have an area that was permanently above water and an area
22 that experiences periods of inundation. The canopy of the hardwood trees extends into areas that
23 are periodically inundated. Downstream of the head, the “tail” or bayhead swamp is much larger

1 than the head portion of the island. The bayhead swamp experiences long periods of inundation
2 because of its lower elevation. The canopy within the tail region is open, allowing sunlight to
3 penetrate areas below (Armentano et al., 2002). In this paper, the “tree line” represents the outer
4 fringe of a tree island and is defined as the point where there is an apparent change in vegetation
5 with respect to the surrounding marsh.

6 Published hypotheses on the formation of tree islands in the Everglades revolve around
7 the topography of the limestone bedrock in Florida, water flow, nutrient concentrations, plant
8 litter accumulation and sediment transport (Sklar and Van der Valk, 2003). In a study of the
9 interactions of tree island vegetation, hydrology and soils in the Everglades, Ross et al. (2004)
10 reported that the pattern of decreasing canopy height from the raised hardwood hammock to the
11 swamp forests immediately downstream represents a decrease in site productivity, as reflected in
12 litterfall rates. This negative correlation between surface elevation and productivity has been
13 demonstrated more generally in the ridge and slough landscape (Ross et al. 2003), and several
14 authors have postulated that, in organic-rich Everglades substrates, a positive feedback between
15 elevation and below ground production could be the basis for maintaining landscape
16 heterogeneity (Givnish and Volin 2003; Wetzel et al. 2005; Ross et al. in press). Willard et al.
17 (2002), reported in their paleo-ecological study of two tree islands in water conservation area 3-
18 B that tree island origin might be due to localized factors such as topographic highs and
19 prolonged dry periods that allowed the establishment of tree island vegetation. The elongated
20 shapes of the islands points to a hydrodynamic factor (Komar, 1983).

21 The fact that most of the islands are tear-shaped with their main axis coinciding with the
22 general direction of water flow is a strong indication that water flow is an important factor in
23 their formation, shape and preservation. However, very few field data related to water flow and

1 sediment transport around the tree islands are currently available. Most data published on tree
2 islands of the Everglades has focused on vegetation patterns (Brandt et al., 1999; Armentano et
3 al., 2002; Olmsted and Armentano, 1997), tolerance of vegetation to water levels (Conner et al.,
4 2002; Ross et al., 2003; Ross et al., 2004), peat depth and elevation (Mason and Van der Valk,
5 2002), nutrient geochemistry (Orem et al., 2002; Noe et al., 2001) and water flow computer
6 simulations (Wu et al., 2002; Bolster and Saiers, 2002). Two studies have evaluated transport
7 within an experimental flume located within the Everglades marsh (Saiers et al. 2003; Harvey et
8 al. 2005). Measurements of water velocity have been reported through the U.S. Geological
9 Survey within the Water Conservation Areas and ENP in areas not immediately adjacent to tree
10 islands (Jenter and Schaffranek, 2001; Riscassi and Schaffranek, 2002, 2003, & 2004). Methods
11 utilized for measuring velocities in these studies were similar as those used in the current study
12 with the exception that these prior studies focused mainly on wet season (June to November)
13 measurements.

14 The objective of this project was to evaluate flow and suspended sediment dynamics in
15 the vicinity of tree islands within ENP through measurements of water depth, velocity, and
16 suspended sediment characteristics. Results were interpreted to evaluate conditions that may
17 limit tree island formation. The focus of the sediment work, was on suspended sediments that
18 were transported in the water column. This study differs from other work in that the tree islands
19 evaluated through this report are located in ENP, within a region where tree islands appear to be
20 much less impacted by human intervention. Also, the water velocity measurements are unique in
21 that they are located in the vicinity of the tree islands and include measurements along transects
22 across these islands. In addition, efforts were made to include measurements throughout the
23 year. The data are used to estimate the rate of sedimentation accumulation and the critical water

1 velocity required to create sediment re-suspension. The results of this study can be used as a
2 starting point for quantifying target conditions that will promote the ridge and slough landscape
3 and the formation of tree islands of the Everglades. In order to achieve this goal, it will be
4 necessary to determine if critical differences occur in water flow and the characteristics of
5 suspended solids between the ridges and the sloughs. Also of interest are potential differences in
6 flow and suspended solid characteristics among different tree islands. Such differences may
7 indicate whether the effects of water flow and suspended sediments are localized or if they can
8 be applied to the Everglades system as a whole.

9

10 **SITE DESCRIPTION AND GEOMETRY OF THE DATA COLLECTION PROGRAM**

11 Everglades National Park is situated on the southern tip of Florida encompassing an area
12 of over 600,000 hectares. Shark River Slough is the major water flow pathway through the
13 southern Everglades. This slough is approximately 32 km wide along its northern border,
14 narrowing to about 10 km near its discharge point at the Gulf of Mexico. Water velocities were
15 presumed to be very low since the hydraulic gradients are only of 3-4.7 cm per kilometer along
16 its longitudinal northeast-southwest axis (Olmsted and Armentano, 1997). The climate of this
17 area is characterized by an average annual air temperature of about 24° C, average annual
18 precipitation of 1,320 mm, and periods of intense evapotranspiration (ET) resulting in estimated
19 ET of 70 to 90 percent of the total amount of rainfall (McPherson and Halley, 1997). The rainfall
20 pattern can be divided into a wet season that extends from June to November, and a dry season
21 from December to May (Noe et al., 2001). Surface water inputs to the area are controlled by a
22 series of gates (S-12A, S-12B, S-12C, and S-12D) situated on Tamiami Trail road, which defines

1 the northern boundary of ENP. Releases through these gates are managed by the South Florida
2 Water Management District (SFWMD).

3 Measurements for this study were conducted in the vicinity of 3 tree islands, known as
4 Black Hammock (BH), Gumbo Limbo Hammock (GL) and a tree island which was named for
5 this study as Satin Leaf Hammock (SL) but that has also been referred to as Indian Camp
6 Hammock and Tiger Hammock in other documents. The smallest tree island was Satin Leaf
7 (length: 0.92 km; width: 0.12 km) and largest was Gumbo Limbo (length: 1.08 km; width: 0.31
8 km). All three islands are located within Shark River Slough, ENP, Florida (Figure 2). Soils in
9 the vicinity of each are peats (organic matter content > 80%), except in a limited (<1000 m²) area
10 within the elevated heads of the islands, where carbonate-rich mineral soils have developed
11 above the outcropping limestone bedrock (Ross et al. 2004; Ross et al. in press). Maximum
12 topographic relief observed at the tree islands is 1 meter (Ross et al. 2004). The vegetation
13 pattern near BH, GL, and SL consists of closed canopy forest in the upstream half of the tree
14 islands, open-canopied woodland with a rich herbaceous understory in their extended tails, and a
15 patterned mosaic of dense and open graminoid communities in the marsh matrix (Ross et al.
16 2004).

17 Data were collected along transects (110 to 1000 m long) at two of the three tree islands:
18 Gumbo Limbo and Satin Leaf. Transects were oriented perpendicular to the islands' main north-
19 south axis (Figure 2). Four transects were established at GL (G0, G1, G2 and G3) and two were
20 established at SL (S1 and S2). The numbering of each transect corresponded to its geographic
21 location where the northernmost transect was represented by the lowest number. Transects G1,
22 G2, G3, S1, and S2 are located on the west side of the islands only. The westernmost point of
23 these transects is considered the origin from which measuring stations are located every 5

1 meters. Transect G0 is the longest transect and has measuring stations every 10 meters. It
2 extends to the east and the west upstream of the island in a direction perpendicular to the island's
3 long axis. The origin of transect G0 is located at its midpoint, where this transect intersects the
4 long axis of the island.

6 **METHODS**

7 Two general types of data were collected, those needed to characterize water flow and
8 those needed to characterize the suspended sediment dynamics. Ancillary measurements
9 included wind velocity and direction. Wind velocity was measured at shoulder level using a
10 hand-held anemometer (Kestrel 1000, Lymington, UK). Wind was observed to affect the top few
11 cm of the water column but the instrumentation used in the current study could not measure
12 water velocity in this layer. Since no correlations were observed between wind speed and water
13 velocity at depth or the characteristics of suspended sediments, wind data were not presented.
14 Data collected through this study were then analyzed to estimate accumulation rates through
15 deposition of suspended sediments and evaluate critical velocities needed for sediment
16 resuspension.

17 **Water Depth and Velocity**

18 Water depth was measured with a ruler in conjunction with the transect work. For semi-
19 continuous readings, water depth was measured in 60-minute intervals using a pressure water
20 level data logger (Infinites USA, Inc., Port Orange, Florida) that was installed on the structure
21 used to support the continuous velocity recording instrument at Gumbo Limbo. The resolution of
22 the instrument was 0.0254cm. The period of record for these water level measurements was June
23 10, 2003 to July 7, 2004. The water level measurements were converted to absolute depth by

1 adding the offset distance between the location of the pressure transducer and soil surface.

2 Water depth measurements were checked during bi-weekly maintenance trips to the site.

3 Acoustical Doppler Velocity meters (ADV) were used for measuring water velocity.

4 These instruments provided the most reliable and accurate water velocity measurements in 3

5 dimensions. These units were designed with a “side-looking” orientation where the acoustical

6 signal was transmitted to the side of the instrument rather than below, thereby allowing for

7 measurements in water as shallow as 15 cms. Two types of ADV’s were utilized in this study: a

8 handheld ADV (SonTek Handheld FlowTracker ADV, San Diego, CA, firmware version 2.4) for

9 measurements along transects and a fixed ADV (SonTek Argonaut-ADV, San Diego, CA,

10 firmware version 11.6) for semi-continuous measurements in time.

11 Early during the study it was recognized that the very low particulate load in the water

12 column resulted in low acoustic reflection, low signal to noise ratios (SNR), and consequently

13 erroneous velocity measurements. The manufacturer of the equipment later replaced the

14 receiver boards of all ADVs used for this project with more sensitive units. According to the

15 manufacturer all units purchased after July 11, 2003 contain the new nano-receiver boards. If a

16 unit was purchased prior to that time, the user will need to contact the manufacturer to confirm

17 whether or not the unit was upgraded.

18 All data reported from the fixed ADVs were obtained with updated nano-receiver boards.

19 The handheld ADV was fitted with the updated nano-receiver board only during measurements

20 for transect G0. All other transect work was completed with the handheld ADVs fitted with the

21 older receiver boards. Seeding of the water column was necessary in order to increase the

22 precision of the handheld ADVs prior to their upgrade. Experiments showed that the standard

23 deviation of the velocity was about 0.04 cm/s when fitted with the new nano-receiver board.

1 Without the new nano-receiver board the standard deviation of the velocity measurements
2 increased to 0.2 cm/s, due to the effects from seeding. During times when seeding was used all
3 data corresponding to an SNR less than 5 dB were disregarded as the standard deviation of the
4 velocity measurements increased significantly (from 0.2 cm/s to 0.9 cm/s) once the SNR values
5 fell below 5 dB. In addition to the effects on the precision of the measurements, seeding tended
6 to impact velocity measurements in the z-direction. Thus when seeding was used, velocity data
7 were revised with only V_x and V_y values used in computing water speed. More details about
8 additional quality control measurements and the impacts of seeding are provided in Bazante et al.
9 2004.

10 The handheld ADV was used for the collection of intensive measurements along the
11 horizontal transects and vertical velocity profiles. Measurements along the horizontal transects
12 were made at a depth of 6/10 of the total water depth. Vertical profiles were obtained by taking
13 measurements every 10 cm. Depth measurements were made with a ruler and wading rod. In
14 areas characterized by dense vegetation, vegetation was removed from a small area in the
15 vicinity of the sensor. The handheld ADV was configured to average data over either 60 or 30
16 seconds. The waiting time, time between placement of the handheld ADV and the collection of
17 measurements, was 5 minutes when seeding was necessary and 3 minutes when seeding was not
18 used. These waiting times were confirmed through field observation, where the obvious effects
19 of the water disturbance were no longer noticeable.

20 Continuous measurements of velocity were collected at all 3 tree islands by installing one
21 fixed velocity recording instrument on the west side of each tree island just south of the
22 hardwood hammocks. The period of record of the fixed ADV units at BH and GL was from
23 October 9, 2003 to March 16, 2004. The period of record at Satin Leaf was longer, commencing

1 on July 9, 2003 and also ending on March 16, 2004. Two conditions lead to notable erroneous
2 data: exposure of the probes to air during extremely low water level and entanglement of
3 vegetation in the probe. Such erroneous data were removed from the record. The period of
4 record ended on March 16, 2004 because water levels were below the 15 cm depth required by
5 the equipment. Extreme low water depths were noted when the signal strength of the fixed ADVs
6 dropped significantly and consistently below 30 counts (30 to 60 counts was the normal range).
7 Signal strength is defined as the intensity of the reflected acoustic signal received by the fixed
8 ADV. Such drops were confirmed through subsequent field visits which showed at least one of
9 the probes out of the water. Disturbance through vegetation was noted by persistent signal
10 strengths much greater than 60 followed by field visits confirming the presence of vegetation in
11 the probes. The fixed ADVs were programmed to store averages of 3000 measurements for each
12 15-minute interval. During each maintenance trip the fixed ADV units were adjusted vertically
13 so that measurements occurred at or near 6/10 depth. A 3-meter long platform was constructed
14 immediately adjacent to each fixed ADV unit to facilitate access to the unit via airboat while
15 minimizing disturbance of the vegetation immediately around the unit. A geo-textile liner about
16 1 m in diameter was positioned below each fixed ADV unit to prevent the growth of vegetation
17 that could block the acoustic signal. Power was provided to each unit through the use of a solar
18 panel that charged an external battery.

19 **Suspended Sediments**

20 Properties of suspended sediments were characterized through measurements of particle
21 size distributions, turbidity, concentration and particle density. Particle size distributions were
22 measured using a Coulter counter (Beckman Coulter, Miami, FL) fitted with a 100 μm aperture
23 which was calibrated with 20 μm latex spheres as recommended by the instrument manufacturer.

1 Bin sizes for particle size distribution analysis ranged from 2 μm to 60 μm . Data compiled from
2 the particle size analysis included the number of particles per size category, the total number of
3 particles, and the average particle size. Each sample was analyzed in triplicate. Turbidity of the
4 water was measured using a nephelometer (Turner Designs Model 40, Sunnyvale, CA). The
5 nephelometer was calibrated with 2 NTU and 20 NTU formazin standard suspensions prior to the
6 analysis of each sample batch. Total suspended solids, and organic and inorganic fractions
7 (mg/l) were analyzed on samples that were filtered in the field with an in-line filtration system
8 using glass fiber filters (Metrigard Product number XE20935) with a nominal 0.5 μm pore size.
9 Total suspended sediments were measured by drying the filters at 100 $^{\circ}\text{C}$ for a period of 1 hour.
10 Organic and inorganic fractions were determined after igniting the filters at 550 $^{\circ}\text{C}$ for 15
11 minutes. Particle density analysis was performed with an in-line filtration system that was
12 capable of collecting at least 0.5 grams of suspended sediments. The in-line filtration system
13 included a yarn-wound filter (1 micron effective pore size) for capturing suspended particles.
14 Once the sample was collected, the sediments were eluted from the yarn-wound filter (U.S. EPA
15 1994). The sediments were then freeze dried with the exception of one sample which was oven
16 dried at 75 $^{\circ}\text{C}$. Once dried, the sediment concentrates were analyzed for particle density using
17 the standard pycnometer method (ASTM 2002). Controls of known particle density were also
18 analyzed within each experimental batch.

19 **Data Analyses**

20 Calculations of soil accumulation rate were used to evaluate whether the low
21 concentrations of suspended solids could have a significant impact on the formation of ridges
22 and tree islands under the conditions in which the data was collected for this study. Direct
23 deposition of material on the soil surface by sinking periphyton and vegetation senescence was

1 not considered within the analysis. The rate at which suspended sediments accumulate is a
2 function of the particles' settling velocity (Chin, 2000) and their concentration in the water. The
3 average concentration measured at GL (1.3 mg/L) was utilized for computation purposes. The
4 Stokes' settling velocity was computed from a water kinematic viscosity and density
5 corresponding to the average measured temperature of 27.5°C, a mean particle size of 3.3 μm, a
6 sediment particle density of 1,480 kg/m³, and a particle shape factor of 1 based upon the
7 assumption of a spherical shape. Particles in water have complex shapes with shape factors < 1
8 (Chin, 2000). The most used shape factor which is physically meaningful is the Corey Shape
9 Factor (CSF) (Dietrich, 1982), where a lower CSF represents a flatter particle. According to
10 Dietrich (1982) and based on the work of Schultz et al. (1954), the mean CSF for most particles
11 in a natural environment is between 0.5 to 0.8, generally decreasing from 0.8 to 0.5 with
12 decreasing size. Samples of bottom sediments were observed through an environmental scanning
13 electron microscope (XL30 Model, Koninklijke Philips, Amsterdam, The Netherlands) and
14 values of 0.3 to 0.4 for CSF were obtained from measurements of particles observed in the
15 images.

16 Critical velocities for particle re-suspension were computed using the method of Kadlec
17 and Knight (1996) since it applies directly to wetlands. According to these authors, flow in the
18 wetlands is slow enough that it can be considered laminar for the water layers in the immediate
19 vicinity of the bottom particles, thereby allowing for the simplification of the calculations.

20 According to Kadlec and Knight (1996) critical velocity (u) is defined as:

$$21 \quad u = 7.2 \left(\frac{\omega_s^{1/3} H^{1/6}}{nd^{2/3}} \right) \quad (1)$$

22 Where ω_s = Stokes settling velocity, m/s (varies with shape factor); H = average transect
23 water depth, 0.63 m; n = Manning's coefficient for open channel, 0.05 s/m^{1/3}; and d = particle

1 diameter, 3.3×10^{-6} m. Kadlec and Knight (1996) calculated a Manning's coefficient of 0.05
2 $\text{s/m}^{1/3}$ for a wetland bottom described as flat and un-vegetated. This description corresponds to
3 the open areas of *Cladium jamaicense* die-offs where the highest water speeds were recorded.
4 Since the calculation was based on the laminar theory, the criteria were checked for the
5 appropriate Reynolds number as recommended by the authors.

6

7 **RESULTS**

8 **Water Depth and Velocity**

9 Water depth data collected at GL varied seasonally with the lowest elevation of 1.47 m
10 (NGVD 88) recorded on June 10, 2003, and the highest elevation of 1.85 m (NGVD 88),
11 recorded on October 1, 2004, resulting in a maximum difference of 38 cm. Water depth
12 measurements also showed that the bottom topography was characterized by the largest gradient
13 (0.004 cm/m) at transect G1 (Figure 3) which was the transect aligned with the head of the tree
14 island. Transect G2 was characterized by the second largest topographic gradient (0.0006 cm/m)
15 and the topography at the remaining transects, G3 and G0, was essentially flat. The hardwood
16 hammock portions of the tree islands are topographic highs with sharper elevation gradients in
17 the vicinity of the tree island "head." There was no clear topographic gradient across transect
18 G3, which was located in the tail portion of the tree island. Topographic gradients measured at
19 Satin Leaf tree island were consistent with those measured at Gumbo Limbo with S1 measuring
20 at 0.003 cm/m and S2 measuring at 0.002 cm/m.

21 The overall average water speed at each of the fixed ADVs was similar, within the 0.8 to
22 1.6 cm/s range (Table 1). This range agreed with measurements by others (Riscassi and
23 Schaffranek 2002, 2003, & 2004) who observed 0.7, 0.7, and 1.4 cm/s on average for stations

1 (Figure 1) GS-203, GS-33, and GS-36, respectively, during the 2003 to 2004 season (October to
2 April) and 1.2 and 0.7 cm/s at GS-203 and GS-33 for the 2002 to 2003 season. These measured
3 values were high in comparison to measurements recorded during the 2000 to 2001 season which
4 were observed at 0.55 cm/s at GS-203 (Riscassi and Schaffrank 2002). A slight decrease in the
5 average water speed was noted during the wet season at BH (1.2 cm/s) in comparison with the
6 average speed measured at GL and SL (1.6 cm/s). During the dry season, the highest average
7 water speed was recorded at GL at 1.3 cm/s with BH and SL measuring at 0.8 cm/s. The higher
8 speed measured during the dry season was expected since GL is located towards the center of
9 Shark River Slough at a lower elevation than the other two tree islands, resulting in a greater
10 accumulation of water. The predominant direction of flow was in the horizontal direction.
11 Vertical components of flow were found to be consistently low (<0.1 cm/s). The primary
12 direction of water flow at GL was aligned almost exactly with the main axis of the tree island
13 during wet and dry seasons. At Satin Leaf the direction was generally offset towards the east at
14 20 degrees. Black Hammock tree island experienced the largest change in flow direction with
15 flow aligned slightly towards the east (5°) during the wet season and strongly towards the west
16 (26°) in the direction towards the center of the slough during the dry season. This change in
17 direction at BH could be due to drainage effects along the outer fringes of Shark River Slough.

18 The range of water speed at BH was typically between 0.5 and 2 cm/s with occasional
19 spikes outside of these values. An analysis of the data indicated that the occasional spikes did
20 not affect the overall statistics of the results and so these data were retained. A decrease in water
21 speed was observed during the dry season as water levels dropped considerably. Water speed at
22 GL was typically between 1 and 2.2 cm/s with occasional spikes outside of this range between
23 October of 2003 and February of 2004. Time series plots from the fixed ADV installed at SL

1 indicated that water speed was more variable than the speed measured at the other 2 locations,
2 with speeds measuring between near zero to 3.5 cm/s (Figure 4). The change in speed observed
3 at Satin Leaf is associated with upstream gate operations. High flows through the S-12 gates
4 correspond to higher velocity measurements at Satin Leaf. The larger variability in water speed
5 at Satin Leaf relative to the other 2 tree islands was still observed when consistent periods of
6 record are compared (Figure 5). Water speed at Satin Leaf exhibited a larger decrease in speed
7 towards the end of October of 2003 and January of 2004, than the other 2 tree islands. This larger
8 variation in water speed is likely due to the closer proximity of this tree island to the flow control
9 gates along Tamiami Trail road. The Shark River observation tower road located immediately
10 east of the tree island (Figure 2) may contribute to the variability by limiting the movement of
11 water.

12 At transect G0 speeds varied spatially by a factor of 5 from 0.4 to 2.0 cm/s (Figure 6).
13 Also of interest is an apparent decrease in speed towards the middle of the wider sloughs, as well
14 as an increase in speed along the edge of the sloughs. *Cladium jamaicense* in the ridge might
15 present a greater resistance to flow than *Eleocharis cellulosa* in the slough. The slower speed in
16 the center of the sloughs could be attributed to higher concentrations of floating vegetation.
17 Water speeds at transects G1 and G2 varied from less than 1 cm/s to more than 4 cm/s, with most
18 measurements between 1 cm/s and 2.5 cm/s. The highest speeds were present in open areas (free
19 from *Eleocharis cellulosa* and *Cladium jamaicense*) outside the tree line and high peaks were
20 also observed inside the tree line. Transect 1 was located at the head of the island and transect 2
21 was located just to the south of the head. Therefore, the portion of these transects located inside
22 the tree line was covered by the tree canopy. This cover did not allow for the growth of
23 underwater vegetation. The water was free to flow through various channels with relatively little

1 resistance from underwater plant growth. This was the presumed cause of the peaks below the
2 tree canopy, which in turn helped to maintain these water paths by decreasing the rate of
3 sediment accumulation. Water speed at transect 3 was similar to the other transects. The highest
4 speeds occurred in the open areas where standing stem densities of *Cladium jamaicense* were
5 much lower (Figure 7). However, this transect is located at the tail of the island and did not have
6 hardwood cover. As a result, sunlight penetrates into the water and underwater vegetation
7 flourishes in this area, creating a barrier for water flow. Water speeds decrease beyond the tree
8 line (G3 + 175) at this transect. As observed at GL, the speeds measured along SL transects were
9 dominated by vegetation type. Water speed was lower in places where vegetation was very thick
10 (S2+10) and comparatively faster in open water areas (S2+30) (Figure 8). Water speed was not
11 related to mean suspended sediment particle size or turbidity.

12 Vertical velocity profiles were measured at representative ridge versus slough dominated
13 areas along transect G0. Water speeds measured in 10-cm increments throughout the water
14 column were observed to vary from 0.2 cm/s to 1.5 cm/s within waters characterized as either
15 ridge or slough (Figure 9). No distinct pattern was observed in the profiles. On average, the
16 speed measured on the ridges was slightly lower (0.8 cm/s) than in the sloughs (0.9 cm/s). The
17 speed profile at the ridge-slough interface was characterized by high variability, with velocities
18 ranging from 0.1 cm/s to 2.3 cm/s.

19 **Suspended Sediments**

20 Particle size distribution of most samples was exponential in nature with the largest
21 number of particles having a smaller average diameter. Mean particle size was relatively
22 constant for all three transects at GL (Table 2). The mean for each transect varied from 2.9 to 3.6
23 μm with a standard deviation of about 1.3 to 1.5 μm within a transect. The median values for the

1 particle sizes were typically in the same range as the mean. The number of particles per ml was
2 found to be relatively constant at approximately 2×10^5 particles/ml at GL and 1.5×10^5
3 particles/ml at SL. Turbidity for GL was relatively low and constant at all three transects. Values
4 ranged from 0.32 NTUs to 0.84 NTUs. Most values were in the 0.45 NTUs to 0.55 NTUs range.
5 For SL, the turbidity values ranged from 0.34 NTUs to 0.75 NTUs (Table 3). Results for
6 suspended sediment concentration were relatively constant between stations. Total suspended
7 sediment values were on the order of 0.5 to 1.5 mg/L, with the exception of one station at S2 and
8 one at G2 where it was above 2.5 mg/L (Figure 10). At this station, a large amount of decaying
9 *Cladium jamaicense* could be observed in the water. The breakdown of the decay material might
10 locally produce light detritus that would account for the higher suspended solids concentrations
11 in these areas. As expected, most of the total suspended solids for all sites were composed
12 primarily of organic matter, between 60 to 65%. Suspended solids concentrations were not
13 observed to be correlated with the hydrologic variables measured in study. Results from the
14 pycnometer analysis indicate the particle density of the 3 suspended sediment samples collected
15 at GL and SL were consistent and on the order of 1.5 to 1.6 g/cm³ (Table 4).

16 **Data Analyses**

17 The average settling velocity was computed as 2.93×10^{-1} m/day for G0 based upon
18 Stokes settling velocity and measured parameters from GL, assuming a CSF of 1. The settling
19 velocity was computed as 8.8×10^{-2} m/day for a CSF of 0.3. For the highest settling velocity of
20 2.93×10^{-1} m/d (CSF of 1), the accumulation rate was computed as 3.81×10^{-1} g/(m²•day) which is
21 equivalent to 140 kg/m² during a 1,000 year period. Since the average particle density at GL was
22 1480 kg/m³, 140 kg/m² represents a potential accumulation of 19 cm in this period of time,
23 assuming a porosity of 50% and without considering decay or oxidation.

1 To obtain the entire range of possible critical velocities that cause particle re-suspension,
2 the lowest and highest values for CSF were used in the calculations, yielding a critical velocity
3 of 7 cm/s (CSF = 0.3) and 10.5 cm/s (CSF = 1.0). This range of velocity was only measured as
4 occasional spikes by the fixed ADVs and was never measured by the handheld ADV during
5 transect work at any of the tree islands. Under the conditions observed during this study,
6 velocities were apparently not high enough to promote sediment re-suspension.

7

8 **DISCUSSION AND CONCLUSION**

9 In this study vegetation was found to play an important role in controlling velocities. In
10 tidal marsh environments, which have similar elongated landscape features as observed in the
11 Everglades, flow pathways and velocities have been observed to be dictated by vegetation
12 density and vegetation types (Leonard and Reed 2002; Reed et al. 1999). Specifically within the
13 Everglades, stem spacing of emergent vegetation (Lee et al., 2004) and floating periphyton mats
14 (Harvey et al. 2005) have been identified as important factors in controlling water velocities.
15 This study found specifically that, in the vicinity of the tree islands, differences in vegetation
16 types and shade from hardwood tree cover plays a key role in controlling the characteristic shape
17 of the tree islands. In this study, the highest speeds recorded were consistently observed in open
18 areas of *Cladium jamaicense* die-offs and the lowest speeds were measured in areas of high
19 density from *Eleocharis cellulosa* and *Cladium jamaicense*. Relatively high speeds were
20 observed inside the tree line in the areas closer to the head of the island, most likely due to the
21 lack of underwater vegetation in this part of the island (due to cover from the trees). Although
22 water flow was obstructed under the canopy due to the presence of tree trunks, roots, and ferns,
23 water was generally channelized and moved around these obstructions in relatively high speed

1 flow. These channels can be visually detected during the dry season. Velocity measurements in
2 these channelized areas, although high relative to velocities measured in other areas, were below
3 the critical value necessary to cause sediment re-suspension or scouring. These results suggest
4 that as water accelerates through these channels around the islands' hardwood hammock, it
5 creates differences in the rate of sediment accumulation. Sediments that would otherwise settle
6 around the island's hammock are carried downstream by the faster moving water in the channels.
7 The development of a canopy which indirectly creates a higher sediment transport rate might
8 impose a limit on how much a tree island is able to grow in the direction perpendicular to flow.
9 This limit in head width might also limit the length of the island as longitudinal growth is
10 associated with litter deposition downstream of the head in the direction of flow. Water speeds
11 generally decrease in areas downstream of the head within the tail portion of the tree island.
12 Within the tail, the trees are sparse and should not impede light penetration into the water,
13 thereby permitting underwater vegetation to flourish. This underwater vegetation impedes flow
14 and decreases water speeds in this area. These conditions would increase sedimentation rates in
15 the tail and promote the elongation of the tree island.

16

17 Time series measurements emphasize the differences in hydrologic parameters between
18 wet and dry seasons. Of interest was the relatively small change in water level (38 cm) measured
19 during this study coupled with the flat topography that suggests a system that is sensitive to small
20 changes in water level. Water speeds were generally less than 3 cm/s at each of the tree islands
21 lowering to near zero at Satin Leaf during the dry season. The differences in average water
22 speed among tree islands were too small to make any conclusions about localized differences
23 within the area of study with the exception that speeds are higher in the center of Shark River

1 Slough during the dry season due to the accumulation of water in this lower topographic
2 elevation. The variability of water speed appears to be influenced by upstream gate operations,
3 with tree islands located closer to the gates showing a larger range in flow velocities. Also a
4 change in predominant flow direction was observed for BH tree island during the dry season,
5 which is presumably due to drainage effects. This tree island is located on the eastern edge of
6 Shark River Slough far from upstream gate operations. Of interest would be to evaluate the long
7 term impacts of this change in flow direction on tree island shape and orientation. Overall the
8 vertical component of flow was found to be consistently low (<0.1 cm/s). This observation may
9 be due to the clearing of vegetation during velocity measurements as other researchers have
10 observed vegetation to induce vertical flow components (Nepf and Koch 1999). Also water
11 levels may have been too low near the tree islands in order induce vertical temperature
12 stratification and subsequent vertically driven flows which have been observed by others in 0.7
13 m water within the Everglades system (Jenter and Schaffranek 2003). The Argonaut units used
14 in this study were located in roughly 0.4 m of water.

15
16 The suspended sediments characteristics were very similar within and between the tree
17 islands. Overall during this study suspended solids were very low and relatively constant, which
18 suggests that suspended sediment transport is at an equilibrium condition where deposition is
19 balanced by the introduction of particles, primarily of organic origin. Interception of particulates
20 by vegetation within the water column (Saiers et al. 2003) also plays a likely role in maintaining
21 equilibrium concentrations. The computed accumulation rates indicate that the rate of suspended
22 sediment deposition is small in open water and it is doubtful that the deposition of suspended
23 sediment under the conditions observed in this study is sufficient to cause the net sediment

1 accumulation needed to form the foundation of the tree islands. It is expected that during storm
2 conditions that are common during the wet season and during extreme events, such as hurricanes,
3 the amount of suspended solids will increase dramatically. It would be of interest to obtain
4 measurements during and immediately following an extreme hydrological event to assess its
5 impact on suspended solids, and their contribution to the formation of ridges and tree islands.
6 Other factors not measured in the current study, including periphyton deposition and vegetation
7 senescence, likely play key roles in tree island formation. It would be of interest to evaluate
8 these other sources of sediments to evaluate their contribution to this process.

9

10 **ACKNOWLEDGMENTS**

11

12 This project was funded through the National Park Service and Everglades National Park
13 (Contract No. H 5000 00 0494 CIF NPS). Partial support was also provided by the Florida
14 Coastal Everglades LTER Program through the National Science Foundation Grant No.
15 9910514. We gratefully acknowledge the assistance received from representatives of the USGS,
16 SFWMD, SonTek, and AMJ Equipment who were very generous with their knowledge and time.
17 In particular we thank Pablo Ruiz, Adam Wood, Alex Croft, Tomoyuki Shibata, Jean Chery,
18 Mary Durbin, and David Jones for their help during our field trips. We also thank Natalia
19 Zürcher, Robert Gawley, John Berry, Lilian Custals, Matthew Lynn, and for their assistance in
20 the laboratory.

21

1 References

2
3 American Society for Testing and Materials, 2002. Standard Test Methods for Specific Gravity
4 of Soil Solids by Water Pycnometer, D 854-00. ASTM International, West
5 Conshohocken, PA.

6
7 Armentano, T.V., Jones, D.T., Ross, M.S., Gamble, B.W., 2002. Vegetation Pattern and process
8 in tree islands of the southern Everglades and adjacent areas. In: Sklar, F.H., and A. Van
9 Der Valk (EDS.). Tree islands of the Everglades, 1st ed. Kluwer Academic Publishers.
10 Chapter 8, 225-282.

11
12
13 Bazante, J., Jacobi, G., and Solo-Gabriele, H., 2004. Draft Technical Report, Documenting the
14 Importance of Water Flow to Everglades Landscape Structure and Sediment Transport in
15 Everglades National Park, Subcontract to the University of Miami. Everglades National
16 Park, Homestead, FL. Available at: [http://www.eng.miami.edu/~hmsolo/tree/
17 members_only/progprep/ENP_Final.pdf](http://www.eng.miami.edu/~hmsolo/tree/members_only/progprep/ENP_Final.pdf) and at: [http://www.eng.miami.edu/~hmsolo/tree/
18 members_only/progprep/ENP_Appendix.pdf](http://www.eng.miami.edu/~hmsolo/tree/members_only/progprep/ENP_Appendix.pdf)

19
20 Bolster, C.H., Saiers, J.E., 2002. Development and evaluation of a mathematical model for
21 surface-water flow within the Shark River Slough of the Florida Everglades. Journal of
22 Hydrology 259, 221-235.

23
24 Brandt, L.A., Portier, K.M., Kitchens, W.M., 1999. Patterns of change in tree islands in Arthur
25 R. Marshall Loxahatchee National Wildlife Refuge from 1950 to 1991. Wetlands 20, 1-
26 14.

27
28 Chin, D.A., 2000. Water-resources engineering. Prentice-Hall, Upper Saddle River, New Jersey.

29
30 Conner, W.H., Doyle, T.W., Mason, D., 2002. Water depth tolerances of dominant tree islands
31 species: What do we know? In: Sklar, F.H., and A. Van Der Valk (EDS.). Tree islands of
32 the Everglades, 1st ed. Kluwer Academic Publishers. Chapter 7, 207-224.

33
34 Dietrich, W.H., 1982. Settling Velocity of Natural Particles. Water Resources Research 18(6),
35 1615-1626.

36
37 Foster, D.R., King, G.A., Glaser, P.H., Wright, H.E., 1983. Origin of string patterns in northern
38 peatlands. Nature 306, 256-258.

39
40 Givnish, T. J. & J. C. Volin, 2003. Self-assembly of Slough-Ridge-Tree island landscapes in the
41 central Everglades: A model for the integration of Hydrological and Ecological
42 Processes. Joint Conference on the Science and Restoration of the Greater Everglades
43 and Florida Bay Ecosystem April 13-18, 2003. Palm Harbor, Florida, USA. Abstract.

44
45 Glaser, P.H., 1987. The development of streamlined bog islands in the continental interior of
46 North America. Arctic and Alpine Research 19, 402-413.

1
2 Gumbrecht, T., McCarthy, J., McCarthy, T.S., 2004. Channels, wetlands and islands in the
3 Okavango Delta, Botswana, and their relation to hydrological and sedimentological
4 processes. *Earth Surface Processes and Landforms* 29, 15-29.
5
6 Harvey, J., Saiers, J., and Newlin, J., 2005. Solute transport and storage mechanisms in wetlands
7 of the Everglades, south Florida. *Water Resources Research*, 41, W05009.
8
9 Jenter, H.J., Schaffranek, R.W., 2001. Vegetative resistance to flow. Continuing project work
10 plan - FY 2001. Project number: 4384-16300. USGS, Reston, VA.
11
12 Jenter, H.J., Schaffranek, R.W., 2003. Thermally-driven vertical mixing in the Everglades.
13 Proceedings of the joint conference on the science and restoration of the Greater
14 Everglades and Florida Bay ecosystem from Kissimmee to the Keys held in Palm Harbor,
15 Fl. South Florida ecosystem restoration task force working group chaired by Ronnie Best.
16 USGS, Miami, Fl., 290-292.
17
18 Kadlec, R.H., Knight, R.L., 1996. *Treatment Wetlands*. Boca Raton: Lewis Publishers.
19
20 Komar, P.D., 1983. Shapes of streamlined islands on Earth and Mars-experiments and analyses
21 of the minimum-drag form. *Geology* 11, 651-654.
22
23 Lee, J.K., Roig, L.C., Jenter, H.L., and Visser, H.M., 2004. Drag coefficients for modeling flow
24 through emergent vegetation in the Florida Everglades. *Ecological Engineering* 22:237-
25 248.
26
27 Leonard, L.A., Reed, D.J., 2002. Hydrodynamics and sediment transport through tidal marsh
28 canopies. *Journal of Coastal Research* 36, 459-469.
29
30 Mason, D.H., Van der Valk, A., 2002. Vegetation, peat elevation and peat depth on two tree
31 islands in water conservation area 3-A. . In: Sklar, F.H., Van der Valk, A., (EDS.). *Tree*
32 *islands of the Everglades*, 1st ed. Kluwer Academic Publishers. Chapter 11, 311-336.
33
34 Mcpherson, B.F., Halley, R., 1997. *The South Florida environment: a region under stress*. U.S.
35 Geological Survey Circular 1134.
36
37 Nepf, H.M., Koch, E.W., 1999. Vertical secondary flows in submersed plant-like arrays. *Limnol.*
38 *Oceanogr.* 44, 1072-080.
39
40 Noe, G.B., Childers, D.L., Jones, R.D., 2001. Phosphorous biogeochemistry and the impact of
41 phosphorous enrichment: Why is the Everglades so unique? *Ecosystems*. 4, 603-624.
42
43 Olmsted, I., Armentano, T.V., 1997. *Vegetation of Shark Slough, Everglades National Park*.
44 SFNRC Technical Report 97-001.
45

- 1 Orem, W.H., Willard, D.A., Lerch, H.E., Bates, A.L., Boylan, A., Comm, M., 2002. Nutrient
2 geochemistry of sediments from two tree islands in water conservation area 3B, the
3 Everglades, Florida. In: Sklar, F.H., and A. Van Der Valk (EDS.). Tree islands of the
4 Everglades, 1st ed. Kluwer Academic Publishers. Chapter 5, 153-186.
5
- 6 Reed, D.J., Spencer, T., Murray, A.L., French, J.R., Leonard, L., 1999. Marsh surface sediment
7 deposition and the role of tidal creeks: Implications for created and managed coastal
8 marshes. *Journal of Coastal Conservation*. 5, 81-90
9
- 10 Riscassi, A.L., Schaffranek, R.W., 2002. Flow velocity, water temperature and conductivity in
11 Shark River Slough, Everglades National Park, Florida: July 1999-August 2001. USGS
12 open file report 02-159. USGS, Reston, VA.
13
- 14 Riscassi, A.L., Schaffranek, R.W., 2003. Flow velocity, water temperature and conductivity in
15 Shark River Slough, Everglades National Park, Florida: August 2001-June 2002. USGS
16 open file report 03-348. USGS, Reston, VA.
17
- 18 Riscassi, A.L., Schaffranek, R.W., 2004. Flow velocity, water temperature and conductivity in
19 Shark River Slough, Everglades National Park, Florida: June 2002-July 2003. USGS
20 open file report 04-1233. USGS, Reston, VA.
21
- 22 Ross, M.S., Reed, D.L., Sah, J.P., Ruiz, P.L., Lewin, M.T., 2003. Vegetation: environment
23 relationships and water management in Shark Slough, Everglades National Park.
24 *Wetlands Ecology and Management* 11, 291-303.
25
- 26 Ross, M. S., D. T. Jones, G. L. Chmura, H. C. Cooley, H. Hwang, K. Jayachandran, S. F.
27 Oberbauer, D. L. Reed, P. L. Ruiz, J. P. Sah, S. Sah, D. Stockman, P. A. Stone & J.
28 Walters, 2004. Tree islands in the Shark Slough landscape: interactions of vegetation,
29 hydrology and soils. Final Report. Submitted to the Everglades National Park,
30 Homestead, Florida, USA.
31
- 32 Ross, M.S., S. Mitchell-Bruker, J.P. Sah, S. Stothoff, P.L. Ruiz, D.L. Reed, K Jayachandran and
33 C.L. Coultas. Interaction of hydrology and nutrient limitation in the Ridge and Slough
34 landscape of the southern Everglades. *Hydrobiologia*. (In press)
35
- 36 Saiers, J.E., Harvey, J.W., Mylon, S.E., 2003. Surface-water transport of suspended matter
37 through wetland vegetation of the Florida Everglades. *Geophysical Research Letters*,
38 30(19).
39
- 40 Schnettler, J., Yerkes, E., Burch, S., 2003. Unleashing the flow. *Civil Engineering*. June 2003,
41 70-75.
42
43
- 44 Sklar, F.H., Van der Valk, A. (EDS.), 2003. Tree islands of the Everglades, 1st ed. Kluwer
45 Academic Publishers.
46

1 Schultz, E.F., Wilde, R.H., Albertson, M.L., 1954. Influence of shape on the fall velocity of
2 sedimentary particles, Sediment. Ser. Rep 5, 161 pp., Missouri River Div., Corps of Eng.,
3 US Army, Omaha, Nebraska.
4

5 Science Coordination Team, 2003. The role of flow in the Everglades ridge and slough
6 landscape. South Florida Ecosystem Restoration Working Group. Aumen, N.G. (ED.).
7 Available at: http://sofia.usgs.gov/publications/paper/sct_flows
8

9 U.S. Environmental Protection Agency, 1994. Code of Federal Regulations, Appendix C to
10 Subpart M, proposed ICR protozoan method for detecting Giardia cysts and
11 Cryptosporidium oocysts in water by a fluorescent antibody procedure. Federal register,
12 Vol. 59, No. 28. U.S. Environmental Protection Agency, Washington, D.C.
13

14 Wetzel, P.R., 2002. Analysis of tree island vegetation communities. In: Sklar, F.H., and A. Van
15 Der Valk (EDS.). Tree islands of the Everglades, 1st ed. Kluwer Academic Publishers.
16 Chapter 12, 357-390.
17

18 Wetzel, PR, AG van der Valk, S Newman, DE Gawlik, TT Gann, CA Coronado-Molina, DL
19 Childers & FH Sklar. 2005. Maintaining tree islands in the Florida Everglades: nutrient
20 redistribution is the key. *Frontiers in Ecology and Environment* 3(7): 370-376.
21

22 Willard, D.A., Holmes, C.W., Korvela, M.S., Mason, D., Murray, J.B., Orem, W.H., Towles,
23 D.T., (2002). Paleocological insights on fixed tree island development in the Florida
24 Everglades: I. Environmental controls. In: Sklar, F.H., and A. Van Der Valk (EDS.). Tree
25 islands of the Everglades, 1st ed. Kluwer Academic Publishers. Chapter 4, 117-152.
26

27 Wu, Y., Rutchey, K., Guan, W., Vilchek, L., Sklar, F.H., 2002. Spatial simulations of tree islands
28 for Everglades restoration. . In: Sklar, F.H., Van der Valk, A. (EDS.). Tree islands of the
29 Everglades, 1st ed. Kluwer Academic Publishers. Chapter 16, 469-498.
30

Parameter	Wet Season ^a			Dry Season ^b			Overall		
	Oct 9/03 - Nov 30/03			Dec 1/03 - Mar 16/04			Oct 9/03 - Mar 16/04		
	SL	GL	BH	SL	GL	BH	SL	GL	BH
Mean Water Speed, cm/s	1.61	1.59	1.20	0.75	1.32	0.77	1.07	1.41	0.88
Direction of Flow, Degrees Clockwise from Main Axis of Tree Island ^c	-25	8	-5	-13	1	26	-20	4	14
Direction of Flow, Degrees from Magnetic North	184	213	219	196	206	250	189	209	238

^a The wet season extends for six months from June to November. Data were collected during 52 days within this time period.

^b The dry season extends for six months from December to May. Data were collected during 105 days within this time period.

^c Primary orientation of the tree islands are 209°, 205°, and 224° from magnetic north for SL, GL, and BH, respectively.

Note 1: Velocity in the z-direction (vertical) is not included because of the very low range of the values (less than 0.1 cm/s) in this direction.

Note 2: Data from the following days was not included because of vegetation entangled in the equipment's probe or because of low water levels. BH: from October 13, 2003 to October 30, 2003 and from February 5, 2004 to February 6, 2004. GL: from February 15, 2004 to February 26, 2004. SL: from February 6, 2004, at 12:00 p.m. to February 24, 2004, at 1:15 p.m.

Table 1: Mean Values of Variables Measured by the Fixed ADVs at Each Tree Island.

Site	Number of Samples	Average Number Particles/mL Analyzed per Sample	Mean Particle Size (μm)	Median Particle Size (μm)	Standard Dev. of Particle Size (μm)
GL Transect 1	26	2.0E+05	2.9	2.7	1.3
GL Transect 2	38	2.2E+05	3.1	3.0	1.3
GL Transect 3	18	2.0E+05	3.6	3.7	1.4
SL Transect 2	5	1.5E+05	3.2	3.1	1.3

Table 2: Summary of Particle Size Characteristics for Each Transect.

	Gumbo Limbo	Satin Leaf
Mean Particle Size ^a	3.13 µm	3.17 µm
Mean Suspended Sediment Concentration	1.3 mg/L	2.0 mg/L
Range of Suspended Sediment Concentration	0.2 to 2.6 mg/L	1.7 to 2.6 mg/L
Turbidity Transect 1	0.63 NTU	0.48 NTU
Transect 2	0.51 NTU	0.49 NTU
Transect 3	0.58 NTU	

^a Mean Particle Size for a sample from Black Hammock was 2.97 µm.

Table 3: Summary of Suspended Sediment Data.

Location	Date Sample Collected	Particle Density	% Organic
Satin Leaf	June 13, 2003	1.57 g/cm ³	65%
Satin Leaf	Aug. 19, 2003	1.52 g/cm ³	66%
Gumbo Limbo	July 25, 2003	1.48 g/cm ³	62%

Table 4: Results from Particle Density and % Organic Analysis for Suspended Sediments.

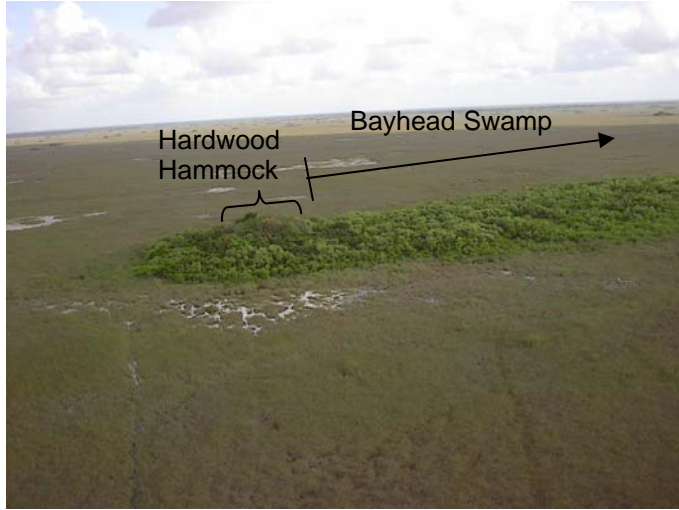


Figure 1: (above) Aerial and Ground Photographs of Gumbo Limbo Tree Island within Everglades National Park, Florida

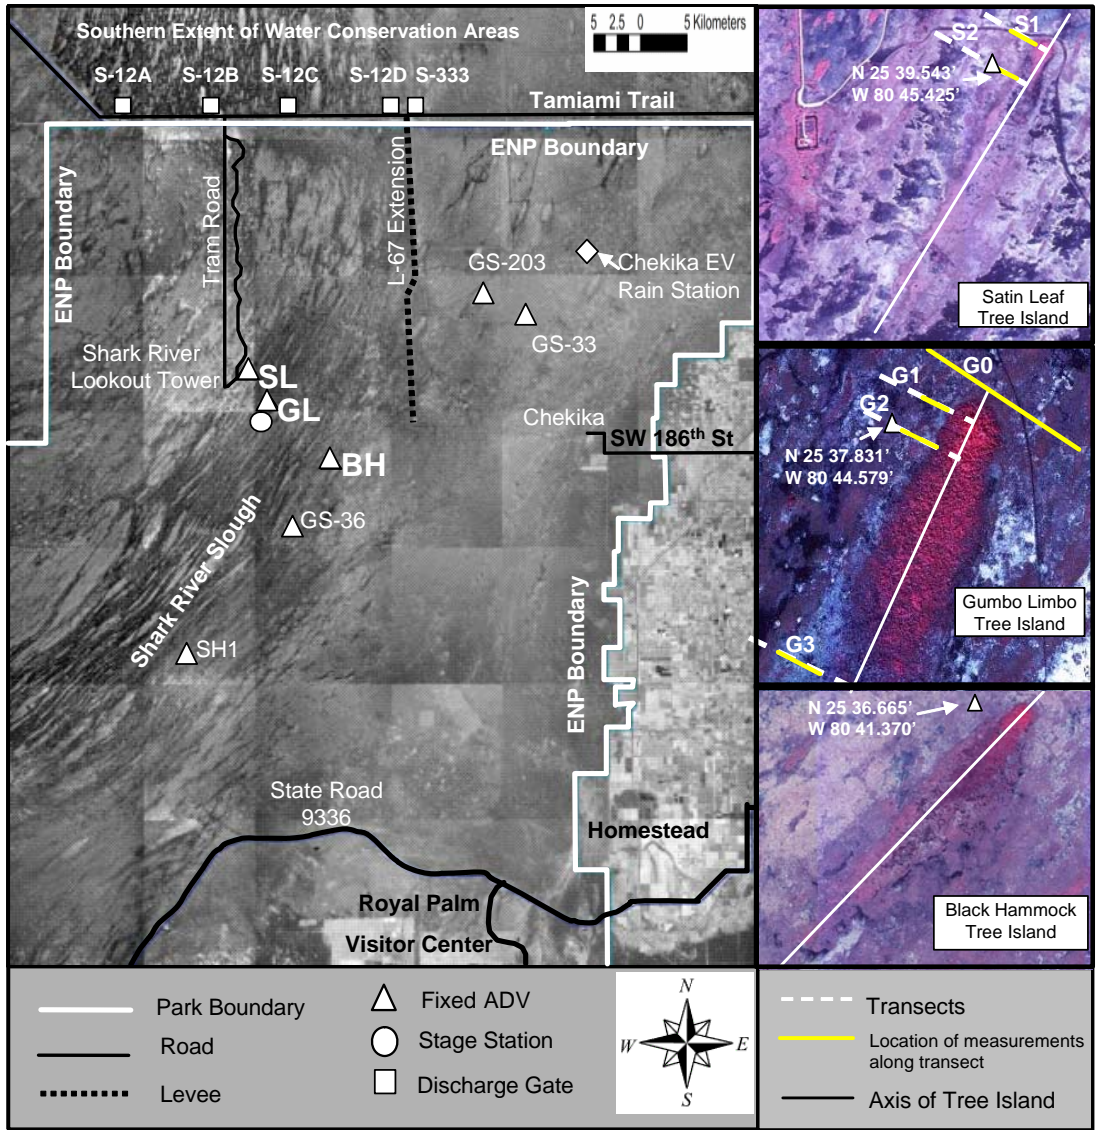


Figure 2: Location of Monitoring Stations Established by this Study Along with the Locations of Other Velocity Monitoring Stations and a Rain Gauge. Aerial Photos of Each Tree Island Show Orientation of Central Axis and Transect Locations. USGS Station SH1 not referenced in text as the period of record for this station did not coincide with the period of record for the current study.

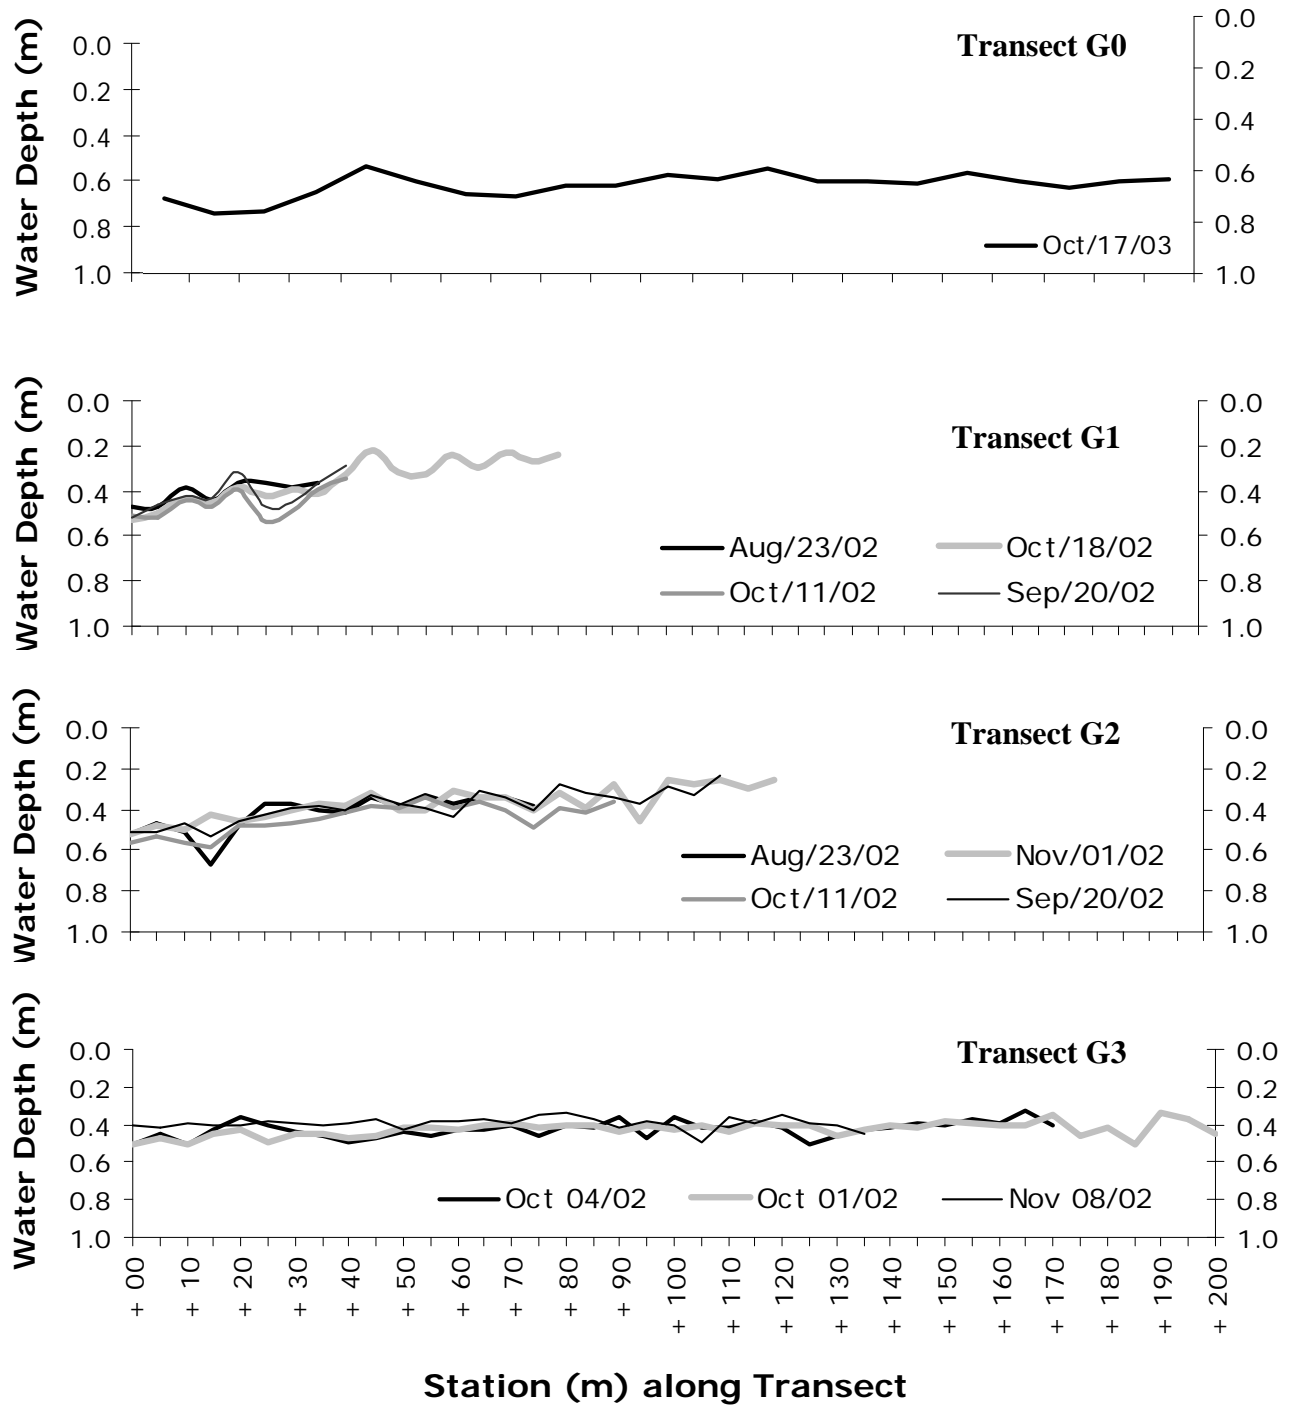


Figure 3: Water Level in Vicinity of Gumbo Limbo Hammock.

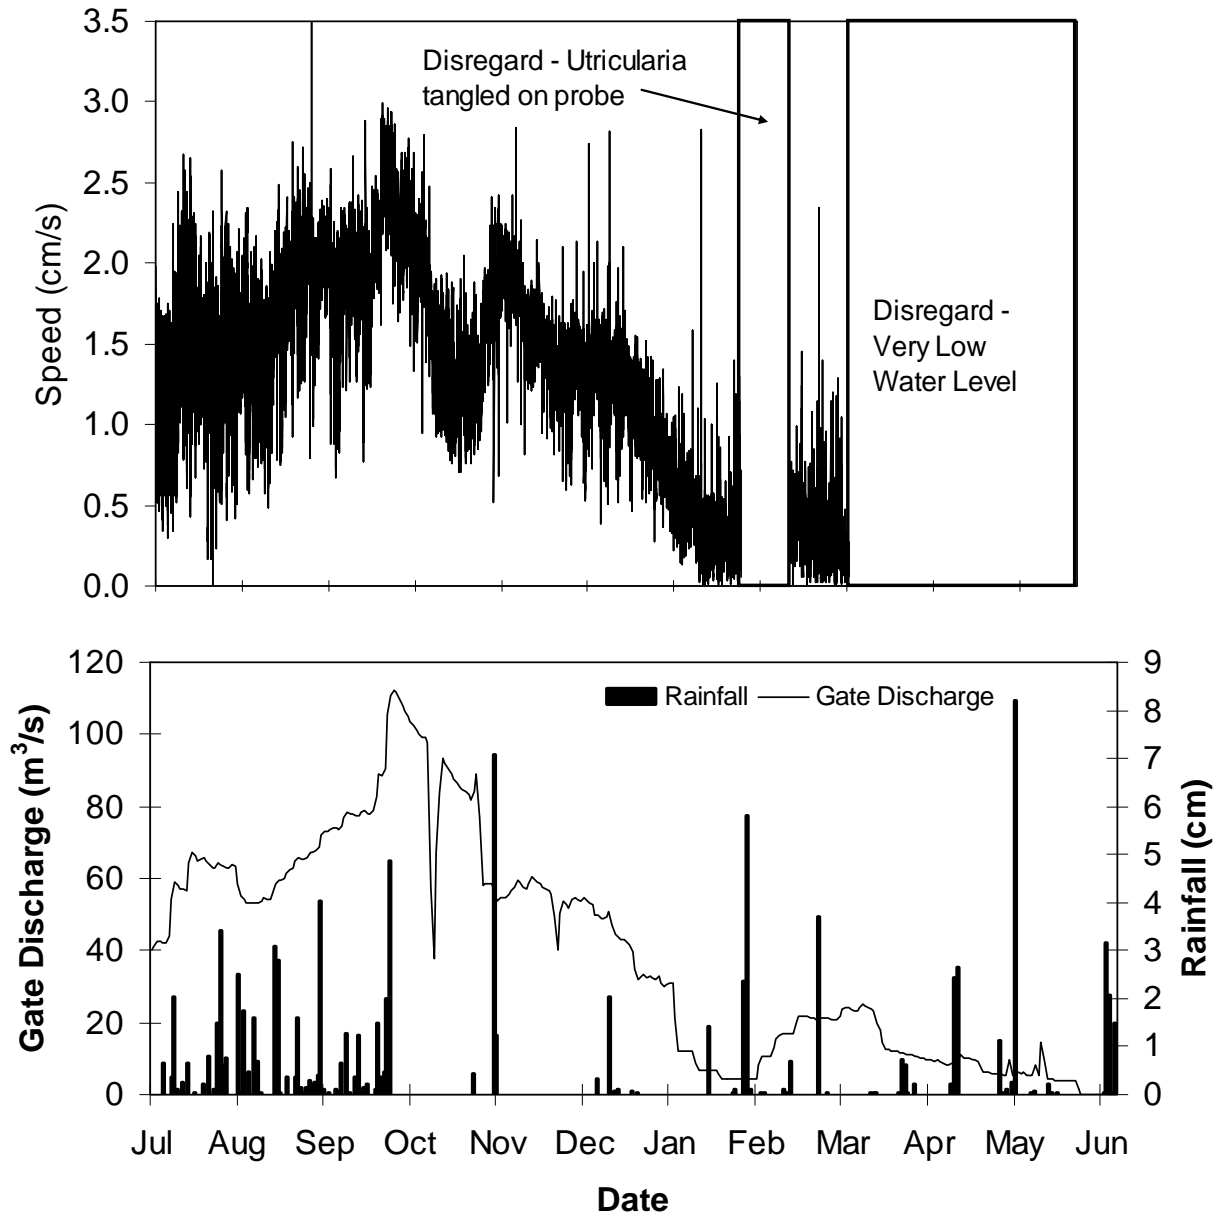


Figure 4: Water Speed Measured at Satin Leaf for the July 9, 2003 to June 8, 2004 Period of Record. Gate flow corresponds to the sum of flow through gates S-12A, S-12B, S-12C, and S-12D.

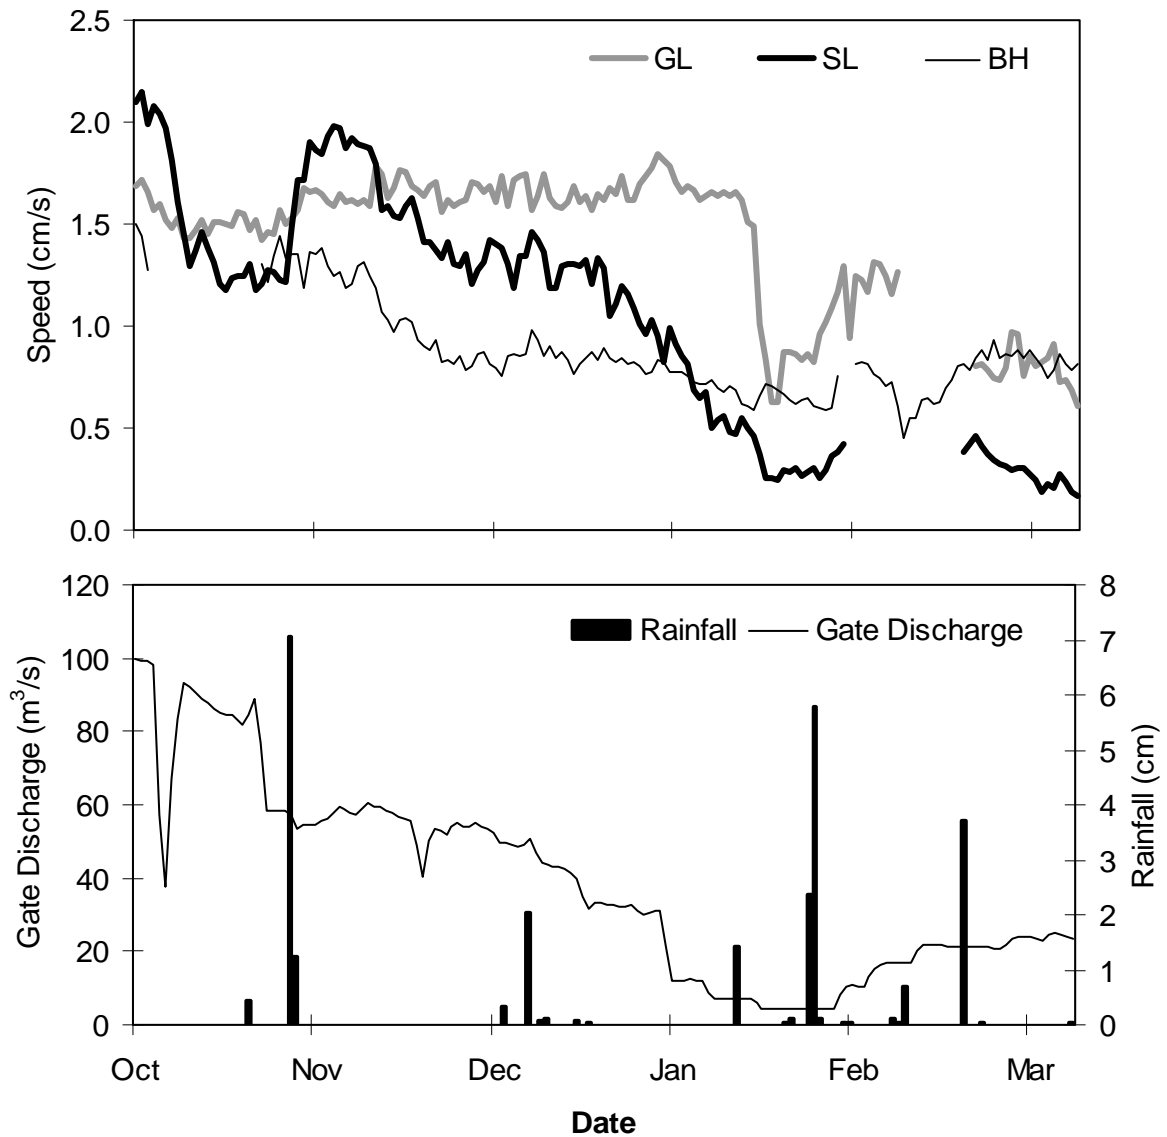


Figure 5: Time Series Plots of Daily Average Water Speed at BH, GL, and SL for the October 10 to March 15, 2004 Time Period. Note: Missing data is due to vegetation entangled in the equipment's probe. Gate flow corresponds to the sum of flow through gates S-12A, S-12B, S-12C, and S-12D.

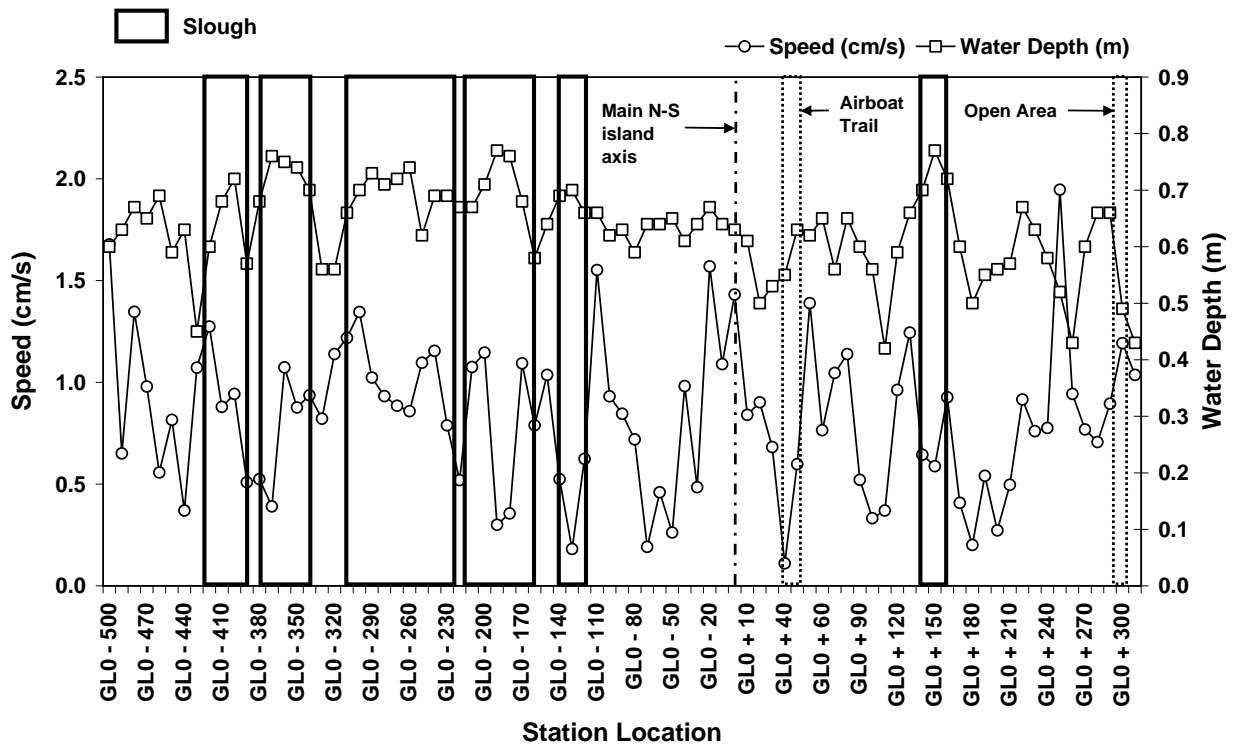


Figure 6: Water Depth and Speed Along Transect 0 at GL Tree Island. Data Collected September 25 through October 23, 2003.

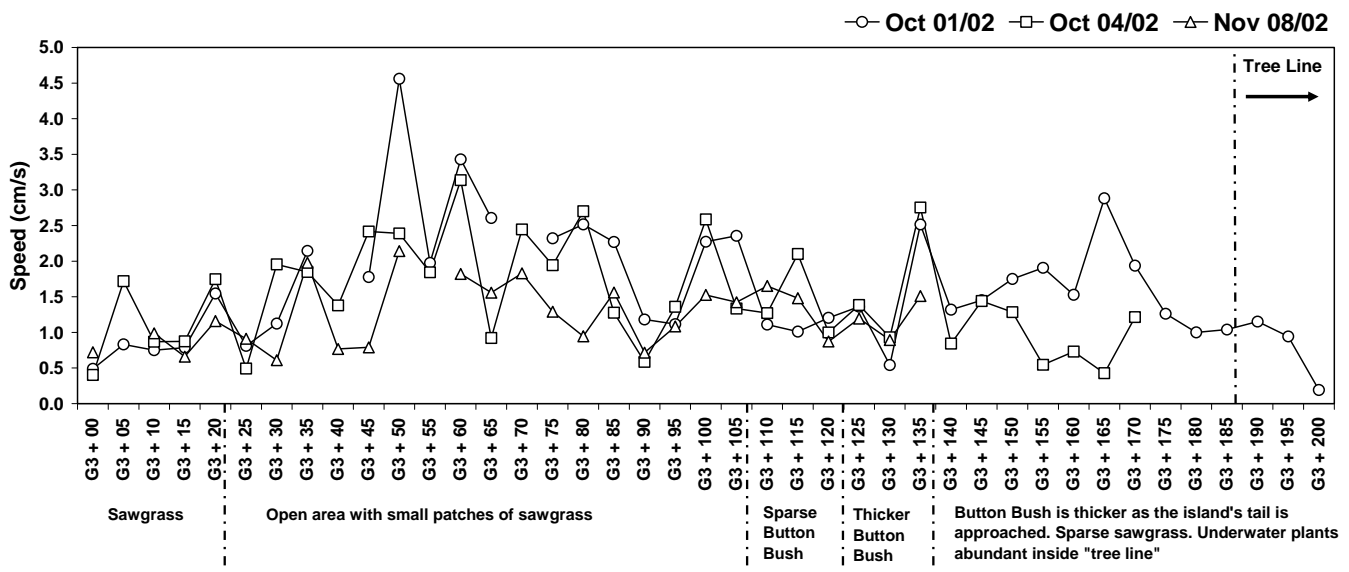


Figure 7: Water Speed Data Collected at GL Transect 3 on October 1, 2002, October 4, 2002, and November 8, 2002.

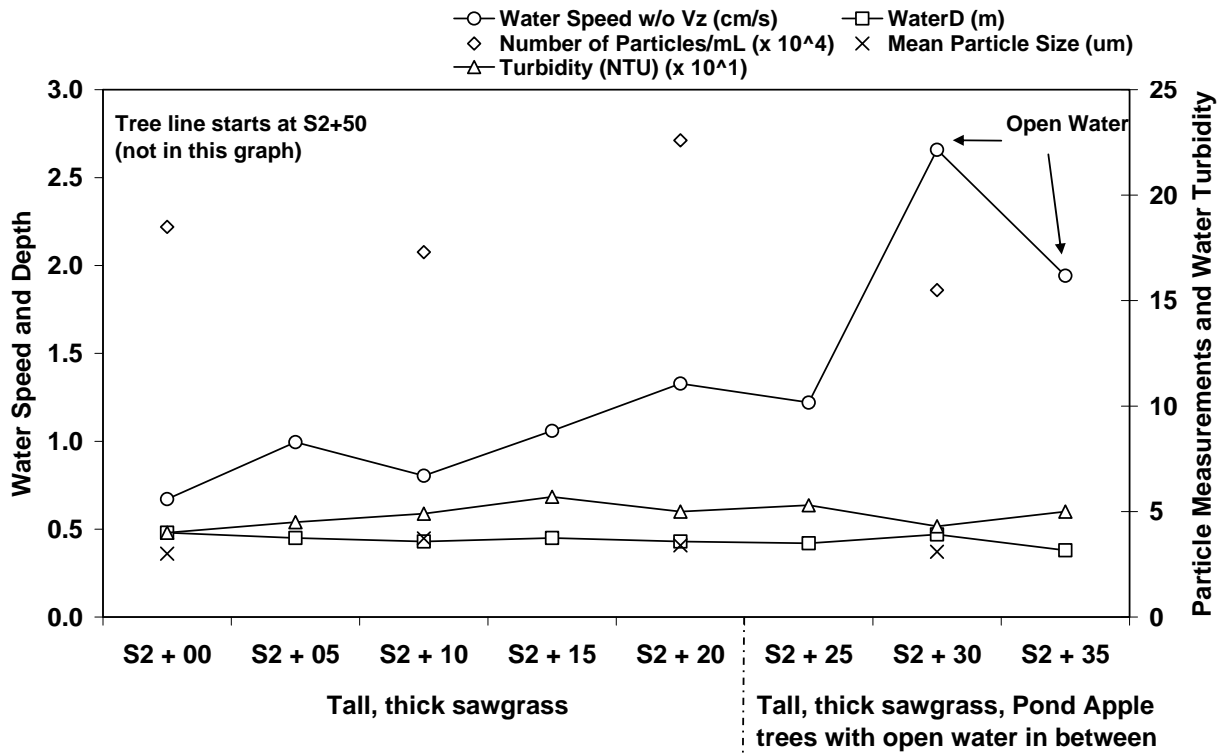


Figure 8: Water speed, depth and turbidity, and suspended solids measurements at SL. Data Collected on October 25, 2002 along Transect 2 at SL Tree Island.

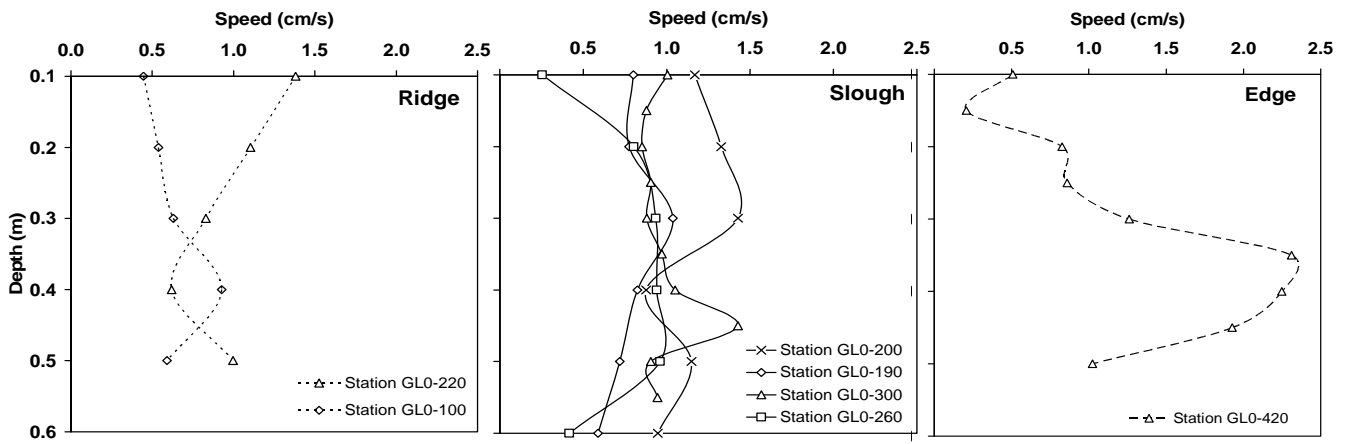


Figure 9: Vertical Velocity Profiles at GL Transect 0. Data Collected in 10 cm Depth Intervals on November 13, 2003.

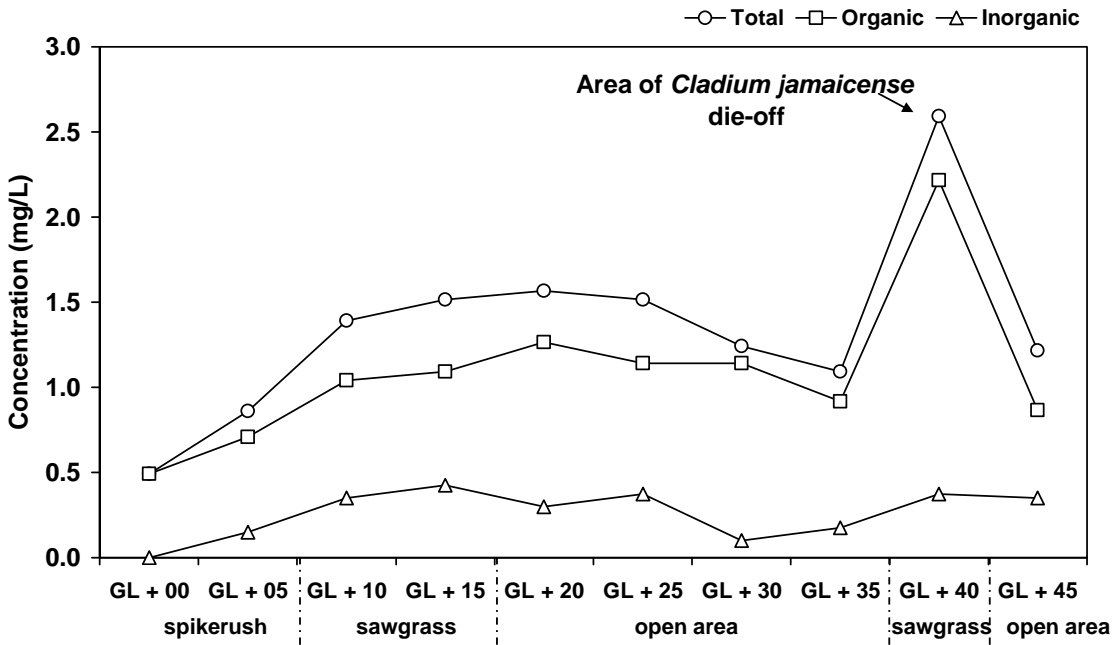


Figure 10: Suspended Solid Data Collected at GL Transect 2 on July 25, 2003.